





PVC-CLEAT

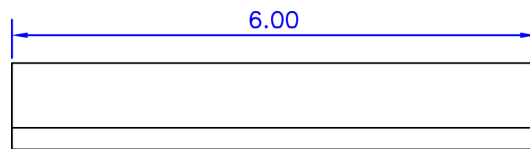

Elgen Manufacturing
300 Murray Hill Parkway, East Rutherford, NJ 07073
(800) 503-9805 :: www.elgenmfg.com

DESCRIPTION

The Elgen PVC (Poly Vinyl Chloride) Cleat is used on Flange. The Elgen PVC Cleat is used on the perimeter of the Flange, four bolt rectangular system. The use of the Elgen PVC Cleat provides uniform compression for the 440 Butyl Gasket between the Flange's.

SPECIAL FEATURES

- Used for Breakaway connections

TECHNICAL INFORMATION

- Service Temp: 32 °F to 150 °F
- UL 723 (Flame Spread 10) (Smoke Develop 10)
- Made from an organic polymer made out of petroleum & salt
 - Not to be used in out door applications

PRODUCT SPECIFICATIONS

Optional Profiles:

- J Flange
- Elgen Flange
 - TDC
 - TDF

PACKAGING

Box Qty

500

PRODUCT GUARANTEE

Elgen's PVC-Cleat is guaranteed by Elgen Manufacturing against defective material.