


RESIDENTIAL 1-3/4" X 3" X 1 3/4" DUCT CONNECTOR



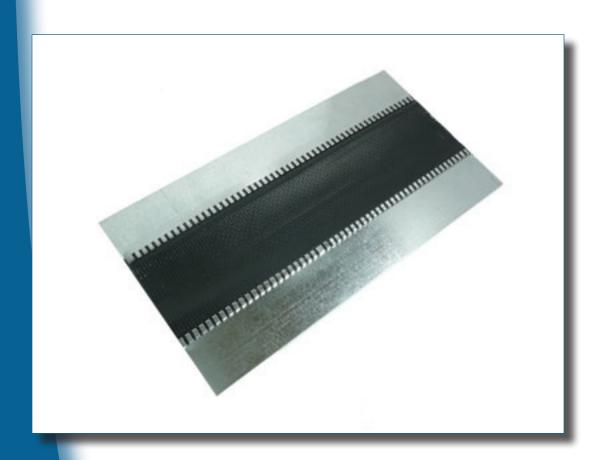

DESCRIPTION

Elgen's Residential 1-3/4" x 3" x 1 3/4" duct connector eliminates duct system noises and vibrations. This is done with an airtight flexible connection consisting of a fabric that attaches to sheet metal on both sides.

TECHNICAL INFORMATION

| | Vinlon | Neoprene |
|---------------------|---|---|
| Temp Range | -40 F to 265 F | -40 F to 200 F |
| Color | Black | Black |
| Weight SQ/YD | 22 | 32 |
| Tear Strength | 100/100 | 25/25 |
| Tensile Strength | 300/300 | 500/500 |
| Features | High Tear Strength, High Abrasion, Low Smoke, Extremely Flexible | Airtight Resistance to Acids, Gasoline & Grease, General Purpose |

All items are Flame Resistant

PRODUCT SPECIFICATIONS

All Elgen fabrics are designed to meet NFPA-701 (formerly UL-214)
Elgen Vinlon fabric meets UL-723 and NFPA-701
All Elgen fabrics are designed to meet NFPA-90A and 90B
All fabrics are water proof and airtight
All fabrics have flame retardant coatings

- ST/ST#304 ST/ST#316
- Aluminum PCD Coated
- Galvanneal (Paint Grip)

PACKAGING

| Size | Gauge | FT Per Box |
|----------------------|-------|------------|
| 1-3/4" x 3"x 1 -3/4" | 28 | 100' |
| 1-3/4" x 6" x 1-3/4" | 28 | 100' |

150' Roll Available Upon Request

PRODUCT GUARANTEE